

ADVANCED PACKAGING
TECHNOLOGIES



PE-D SERIES

AUTOMATIC SLEEVE WRAPPER

GROW YOUR BUSINESS

www.packpark.com.tr



PE-D SERIES

FRONT FEED AUTOMATIC SLEEVE WRAPPER



Advantages:

- Customized design, strong mechanics for high products
- Easy to integrate with the production lines directly
- Portable mono-block chassis on caster wheels with brakes
- Recordable and re-callable temperature adjustments
- Ability to read instant or total realized capacity by counter

Features:

- Motorized belts for automatic feeding and discharge
- Automatic length recognition with photocell and encoder
- Package feeding gap control with PLC and photocell
- User-friendly colorful touch screen operator panel
- Automatic film feeding with motor driven roll film chamber

Sealing:

- Perfect sealing with double linear bearing cutting jaw
- Lower jaw profile with Teflon tape coating on silicone
- Teflon coated hot cutting thick welding upper jaw
- Welding blades suitable for different packaging materials
- Photocell for under-jaw product detection and protection

Flexibility:

- Easy adjustment for different capacities and product sizes
- Various language options and adaptable touch keyboard
- All parameters can be entered via the color touch screen
- Memory Receipt property for prompt adjustments
- Blade structure is suitable for films of different thicknesses

Optional:

- Printed film control system
- Automatic top-bottom easy film drive systems
- Spare reel chamber and film splicing (manual) system
- Ability to control external belts from the operator panel
- Product balancing or pressing with top press piston

Quality:

- ISO 9001 quality standard with the relevant norms
- CE marking
- One year warranty on non-wearable parts
- Manufacturer's guarantee for spare part & after sales
- 1 set of wear parts is provided along with the machine



www.packpark.com.tr

**INDUSTRIAL
PACKAGING**

PE-D SERIES

FRONT FEED AUTOMATIC SLEEVE WRAPPER

SPECIFICATIONS

Sealer Opening:
Max. Speed:
Max. Cycle:
Max. Roll Diameter:
Working Height (D):
Comp. Air Supply:
Film Types:
Color:

400 mm
20 m/min (adjustable)
20 packs/min
Ø 350 mm (adjustable)
860-960 mm
6-7 bar
30-80 µm PE
Mixed grey + RAL7010 + RAL7015

TECHNICAL DATA

PE 60 D

Cross Sealer Length:
Conveyor Belt Width:
Max. Film Width:
Installed Power:
Average Consumption
Dimensions (AxBxC):
Palletized Size (AxBxC):
Weight (Net / Gross):


680mm
600mm
600mm
5 Ampere
3kW
1300x2000x2200mm
1500x2200x2400mm
350 kg / 450 kg

PE 80 D

840mm
800mm
800mm
6 Ampere
3kW
1500x2000x2200mm
1700x2200x2400mm
450 kg / 570 kg

PE 100 D

1050mm
1000mm
1000mm
7 Ampere
3,8kW
1650x2000x2200mm
1850x2200x2400mm
550 kg / 690 kg

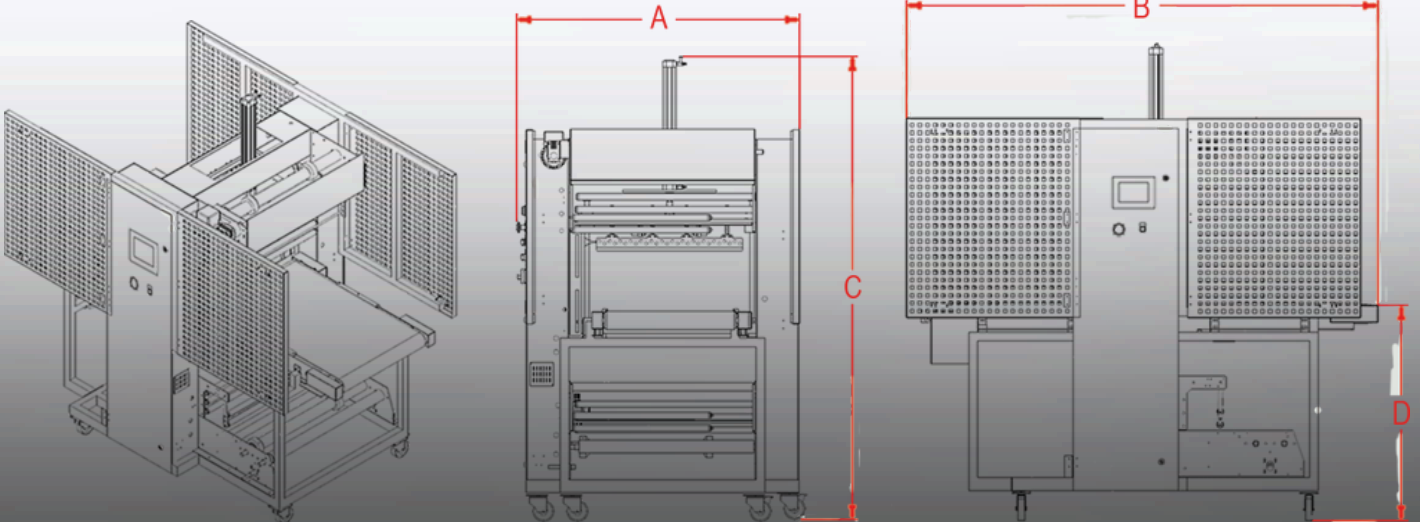

www.packpark.com.tr

**INDUSTRIAL
PACKAGING**

FOR MORE INNOVATIVE
PACKAGING SOLUTIONS



info@packpark.com.tr



+90 533 690 0555



Park Industrial Packaging Equipments Ltd.
Esentepe, Kelebek Sk. No:2, Marmara Kule A Blok 203, 34870 Kartal/İstanbul - TÜRKİYE
Tel. +90 216 353 5466 Mobile/WhatsApp: +90 533 690 0555
info@packpark.com.tr www.packpark.com.tr

**INDUSTRIAL
PACKAGING**